

INSTRUCTIONS

Tote 'N Go Chest Rack
TG1700/TG1710

IMPORTANT: MAX. LOAD
CAPACITY IS 150 LBS. TO
AVOID DAMAGE TO THE
ICE CHEST, OR STORAGE
BOX, PLEASE FOLLOW
INSTRUCTIONS CAREFULLY.

- ENCLOSED: (1) Tote 'N Go Chest Rack (Partially Assembled-4 pieces total)
(3) 30" Strap with Superlock Buckle
(2) 75" Strap with Superlock Buckle

Before you begin, please make sure that you have the right model for your vehicle's ladder. See FIG. 2 below.


ASSEMBLING THE RACK

1. Position Parts A, B, C, D as shown in FIG. 1a. NOTE: The round section of the tube for parts C & D must face up as in FIG. 1b.

2. Insert Part B tubes into Part A, by pressing the Clips in part B. NOTE: Both tubes must be inserted at same time. Upon reaching the first hole, the Clips must be pressed again to advance to the next hole. You may need to lean Part A against the wall while pressing the clips and advancing towards next hole. If necessary, use a pen to depress the clips. Adjust to desired width by repeating the above process.

3. Once the width of the rack is adjusted, insert Part C into Part B, by depressing the Clip. Make sure the round side of the tubing is facing up. Otherwise, the arm will not move beyond the first hole.



4. Repeat step 3 for Part D. Then, adjust to desired length for cargo.

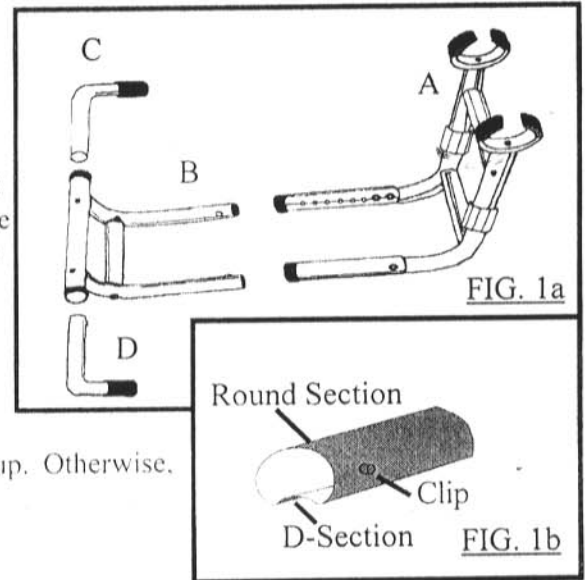

MOUNTING THE RACK TO THE MOTORHOME, OR VAN LADDER

1. Using the simple 3-steps procedure shown in FIG. 2, hook Tote'N Go Chest Rack onto the step closest to the support extension (approximately, 3rd or 4th step up from the bottom of your ladder). If vans, make sure the lowest part of the rack is above the bumper.

2. With the rack hooked onto the proper step of your ladder, center it between the vertical rails of the ladder (FIG. 3).

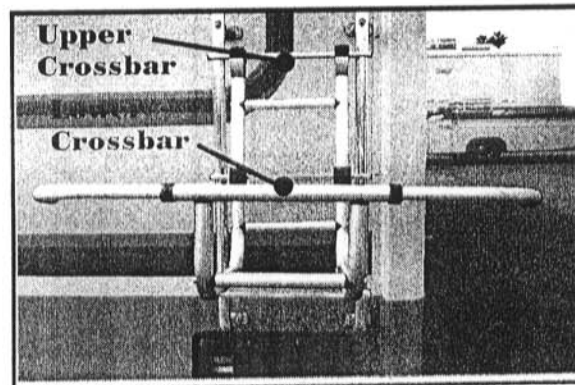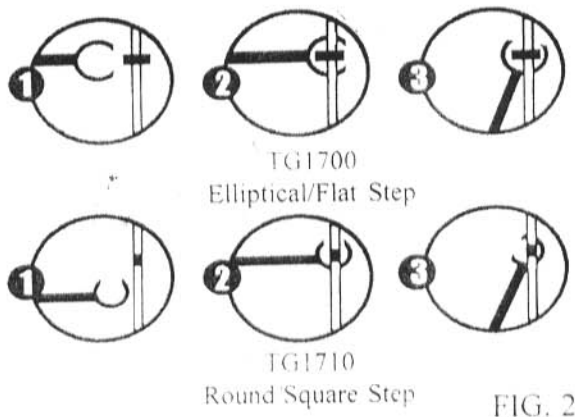

3. Two 30" straps with Superlock Buckles. These straps are installed around the upper crossbar of the Chest Rack and one step of the ladder. Strap goes from the INSIDE of the Chest Rack on the top, to the OUTSIDE of the Chest Rack at the bottom, one on each side. (See FIG. 3 for location of the crossbars, and FIG. 4a).

Buckles must be threaded as shown in FIG. 4b.


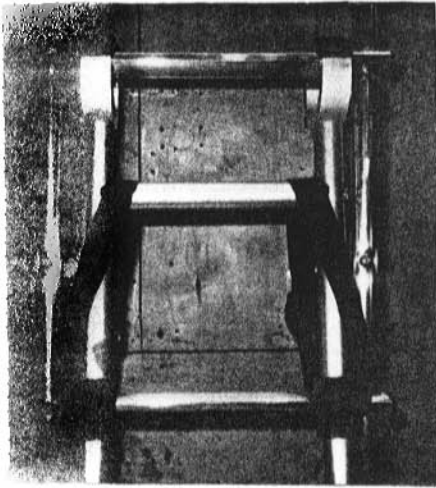


FIG. 4a

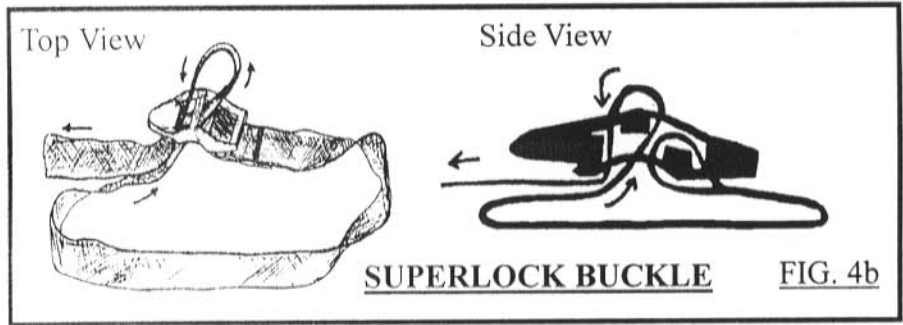

4. Use third 30" Strap w around the center of the lower crossbar and the step of the ladder immediately below the crossbar (FIG. 5). NOTE: See FIG. 4b for threading instructions. **PULL STRAP TIGHT AFTER CONTAINER IS FILLED!** Extra strap length should be tied off. **IMPORTANT:** The Buckle must be on a straight section to tighten.

5. Place the container in the rack. **IMPORTANT:** Adjust width, and/or length as needed. Avoid excess space between the rack and the container to provide the optimum fit and security for your container (FIG. 6).

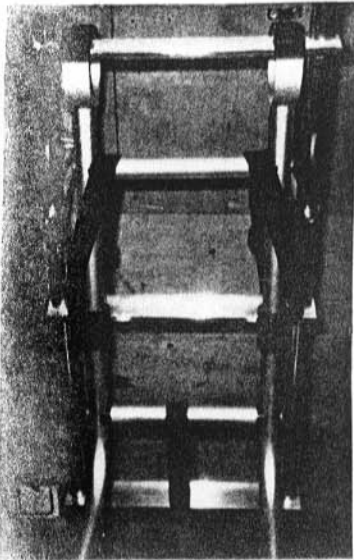


FIG. 5

6. Use 75" Strap with Superlock Buckle to thread around the middle step behind the rack (strap should lay in between the ladder rail and the rack's vertical arm), over the top of the container and around the top horizontal bar in the front of the rack. Then go under the container and return to the back of the ladder where the buckle should be threaded.. See FIG. 6. **PULL STRAP TIGHT!** Extra strap length should be tied off. NOTE: Strap will not tighten if buckle is placed on a curved section, such as step and tubing. It must be placed on straight sections such as areas in between steps, top of container, etc.

Repeat above step with the second strap on the other side.

OPTIONAL: Locking Cable can be used to secure the rack and the container (Locking Cable sold separately).

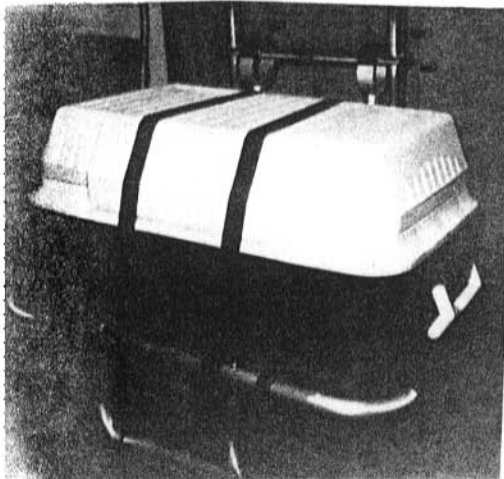


FIG. 6

7. EXTENDED ARM KIT (Part # TG1750) is also available for larger containers. See chart on next page for capacity. To obtain this kit, see your Dealer or call Top Line at 1-800-653-0605.

CONTAINER SIZE	STANDARD ARM	EXTENDED ARM
QUARTS	18 TO 56	56 TO 94
LENGTH	18" TO 28"	28" TO 35-1/2"
WIDTH	13" TO 18-1/2"	13" TO 18-1/2"
HEIGHT	8" TO 17"	8" TO 17"

MAXIMUM LOAD CAPACITY IS 150 LBS. REGARDLESS OF THE CONTAINER SIZE.

8. If you have any questions, or need to order spare parts, please call Top Line at 1-800-653-0605 or 1-562-633-0605 outside of USA.

DESCRIPTION

30" Strap w/Superlock Buckle
75" Strap w/Superlock Buckle
Locking Cable

PART #

03-0048-00
03-0072-00
LC2650



Paramount, CA